




A 63A cabinet with foldable stainless steel leg, made of powder-coated and corrosion-resistant 2 mm aluminum. The outlets are behind a lockable door so the cabinet is well suited for the initial stage construction site. Robust construction that withstands hard handling.

TEKNISET TIEDOT

Tuotekoodi	S19115
Nominal Current	63 A
Nominal voltage	400 V (50 Hz)
Socket outlets	6 x 16A (230V), 3 x 16A, 2 x 32A, 1 x 63A
RCD	30 mA ja 500 mA
Short-circuit resistance	I _{cf} = 17 kA

Weight	21 kg
Measurements (H x W x L)	885 x 735 x 282 mm
Enclosure class	IP44
Model	U63/6321-21 FI
Ordering number	S19115
Approvals	CE, EN 60 439-4

PIIRIKAAVIO

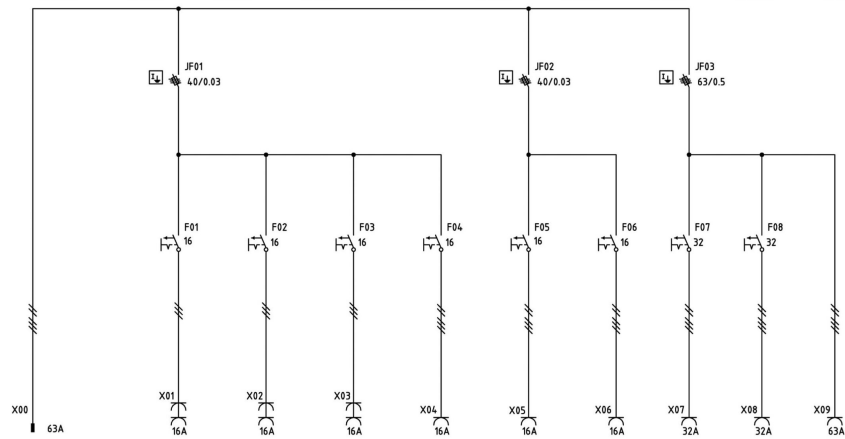

KUVAT

