




125 A cabinet with fixed input cable connection with foldable stainless steel leg, made of powder-coated and corrosion-resistant 2 mm aluminum. The outlets are behind a lockable door so the cabinet is well suited for the initial stage construction site. Robust construction that withstands hard handling.

TEKNISET TIEDOT

Tuotekoodi	S19323
Nominal Current	125 A
Nominal voltage	400 V (50 Hz)
Input	Virtakytkin 125 A
Size of the input cable	10-95
Socket outlets	3 x 16A (230V), 1 x 16A, 2 x 32A, 2 x 63A
RCD	30 mA ja 500 mA

Oikosulkukestavyys	I _{cf} = 17 kA
Weight	41 kg
Dimensions (H x W x D)	1145 x 884 x 331 mm
Enclosure class	IP44
Model	SF125/3122-13
Ordering number	S19323
Approvals	CE, EN 60 439-4

PIIRIKAAVIO

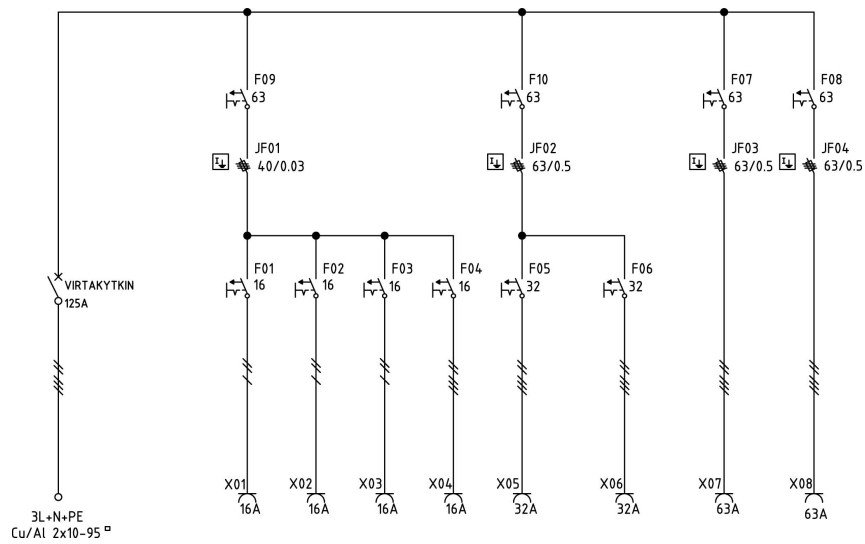

KUVAT

