


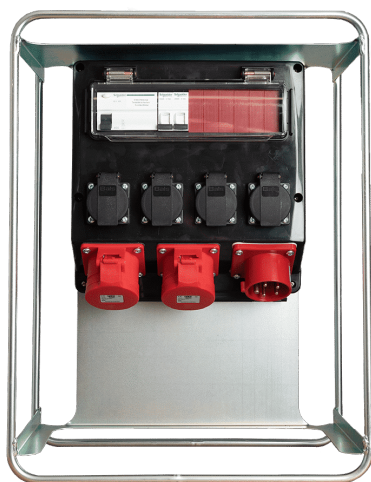

A robust and powerful Finnish-made compact housing power distributor for use at worksites. Also available without steel-tube frame.

TEKNISET TIEDOT

Tuotekoodi	5000327
Nominal Current	16A
Nominal voltage	400A (50 Hz)
Socket outlets	4 x 16A (230V), 2 x 16A
RCD	40A 30mA
Fuses	2 x C16 1-P (auto)

Weight	7,5 kg
Dimensions (W x D x H)	40 x 21 x 52cm
Enclosure class	IP44
Model	TAS16/1/K
Approvals	CE