



A small and affordable cabinet that is also suitable for tighter spaces. The doors are only on one side of the cabinet i.e. the input and outputs are on the same side of the cabinet. Thanks to the modular design, the cable outputs can be modified according to needs. There are 5 module slots, of which 4 slots are free as standard. The powder-coated and corrosion-resistant aluminum frame has lifting eyes and forklift pockets.


PÄÄOMINAISUUDET



TEKNISET TIEDOT

Tuotekoodi	19005047	Current transformer	300/5
Nominal Current	250A	Weight	98 kg
Nominal voltage	400V 50Hz	Measurements (H x W x L)	131 x 137 x 40 cm
Fuse output	1 x SLK 160 (+ 4 vapaata paikkaa)	Enclosure class	IP44
Socket outlets	3 x 16A (230V), 2 x 16A, 1 x 32A, 2 x 63A	Model	ZFSF250B-1-3212-22
RCD	30 mA ja 300 mA	Ordering number	S19685
Short-circuit resistance	Icf = 25 kA	Approvals	CE

PIIRIKAAVIO

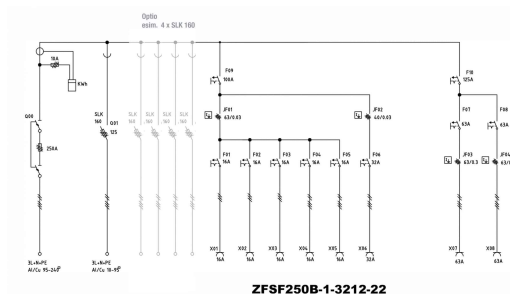

KUVAT

