


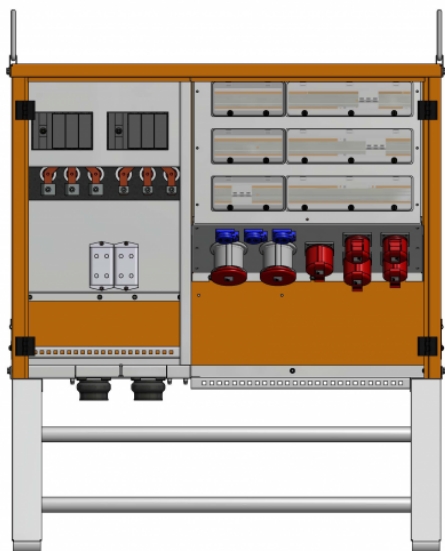

The 160A site substation is made of powder-coated and corrosion-resistant 2 mm aluminum. The solid structure of the cabinet withstands hard handling on site. The cabinet is equipped with lifting eyes, a stand designed for the truck and has lockable doors.

TEKNISET TIEDOT

Tuotekoodi	S19299	Oikosulkukestavyys	Icf = 25 kA
Nominal Current	160 A	Current transformer	200/5 0,2S
Nominal voltage	400 V (50 Hz)	Weight	77 kg
Input fuses	NH00 160 A	Dimensions (H x W x D)	1239 x 1163 x 405 mm
Size of the input cable	1×95-240	Enclosure class	IP44
Fixed outlet	1 x SLK 160 NH00 160A	Model	FSF160/1/3322-23 FI
Socket outlets	3 x 16A (230V), 3 x 16 A, 2 x 32A, 2 x 63A	Ordering number	S19299
RCD	30 mA ja 300 mA	Approvals	CE

PIIRIKAAVIO

