


The 160A site substation is made of powder-coated and corrosion-resistant 2 mm aluminum. The solid structure of the cabinet withstands hard handling on site. The cabinet is equipped with lifting eyes, a stand designed for the truck and has lockable doors.

TEKNISET TIEDOT

Tuotekoodi	S19299	**Oikosulkukestavyys**	Icf = 25 kA
Nominal Current	160 A	**Current transformer**	200/5 0,2S
Nominal voltage	400 V (50 Hz)	**Weight**	77 kg
Input fuses	NH00 160 A	**Dimensions (H x W x D)**	1239 x 1163 x 405 mm
Size of the input cable	1×95-240	**Enclosure class**	IP44
Fixed outlet	1 x SLK 160 NH00 160A	**Model**	FSF160/1/3322-23 FI
Socket outlets	3 x 16A (230V), 3 x 16 A, 2 x 32A, 2 x 63A	**Ordering number**	S19299
RCD	30 mA ja 300 mA	**Approvals**	CE

PIIRIKAAVIO

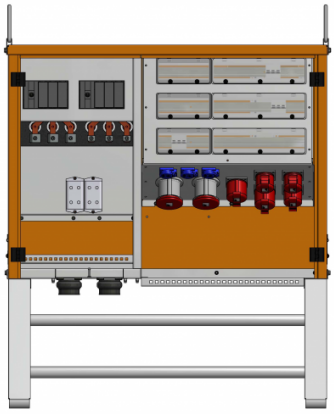