




Lightweight and compact site cabinet that can either stand on its own or can be hung on a wall. Easy to lift from its carrying handle and light (11 kg) to carry. The cabinet has self-closing, lockable safety covers. The solid frame of the cabinet is made of powder-coated and corrosion-resistant 2 mm aluminum and withstands heavy use on construction sites.

TEKNISET TIEDOT

Tuotekoodi	S19124
Nominal Current	63 A
Nominal voltage	400 V (50 Hz)
Socket outlets	8 x 16A (230V), 1 x 16A, 1 x 32A, 1 x 63A
RCD	30 mA ja 500 mA
Short-circuit resistance	$I_{cf} = 17 \text{ kA}$
Weight	11 kg

Dimensions (H x W x D)	543 x 466 x 273 mm
Enclosure class	IP44
Model	U63/8111-11 FI
Ordering number	S19124
Approvals	CE
Model, PRO	Mini63/4221-11 FI
Ordering number PRO	S19355

PIIRIKAAVIO

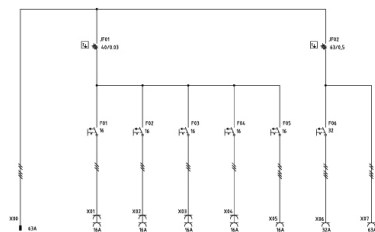

5 A*

KUVAT

