




Designed for really large sites, the TPK 1250A control panel can be modified as needed during the ordering phase. The delivery time is approx. 6 weeks, so that the cabinet can be modified according to the customer's needs. The cabinet is sturdy and has lifting loops and forklift pockets on the stand. Power supply, space allocation for the kWh meter and outputs are all behind lockable doors. The powder-coated 2 mm marine aluminum body material is corrosion-resistant. The cabinet has a 1200 A railing and current transformer measurement.

TEKNISET TIEDOT

Tuotekoodi	S19184	Oikosulkukestavyys	Icf = 25 kA
Nominal Current	1200 A	Weight	425 kg
Nominal voltage	400 V (50 Hz)	Dimensions (H x W x D)	1683 x 1587 x 1277 mm
Input	1200 A (4 x 400 A)	Enclosure class	IP44
Size of the input cable	4x95-240	Model	ZF1200/304 FI
Kiinteät lähdöt	NH00 125A ja NH3 400A	Ordering number	S19184
Fuse output	3 x SLK 160 ja 4 x SLK 630	Approvals	CE, EN 60 439-4
Vikavirtasuojakytkimet	30 mA ja 300 mA		

PIIRIKAAVIO

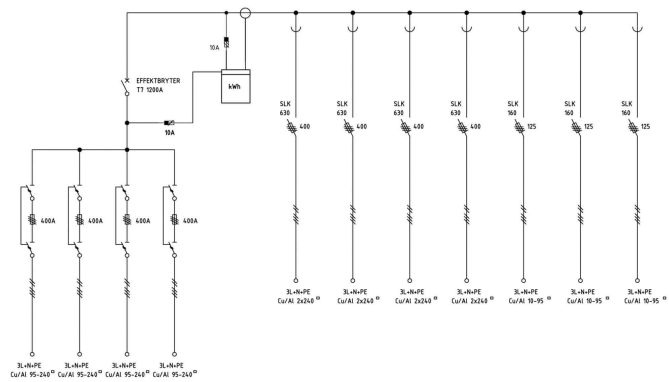

KUVAT

