




Modular temporary power supply cabinet with meter for heavy site use. Robust and compact marine aluminum frame, lifting eyes, forklift pockets and lockable doors. Space reserve for kWh meter. 400A rail. Weight 180 kg.

TEKNISET TIEDOT

Tuotekoodi	S19319
Nominal Current	250A
Nominal voltage	400 V 50 Hz
Input fuses	NH1 250 A
Size of the input cable	1 x 95-240
Kiinteät lähdöt	NH00 125A ja NH1-2 250A
Fuse output	2 x SLK 160 ja 1 x SLK 400
Socket outlets	3 x 16A (230V), 3 x 16A, 2 x 32A, 2 x 63A
RCD	30 mA ja 300 mA

Oikosulkukestavyys	Icf = 25 kA
Current transformer	300/5 0,2S
Weight	180 kg
Measurements	1838 x 1018 x 835 mm
Enclosure class	IP44
Model	ZFSF250/21/3322-23 FI
Ordering number	S19319
Approvals	CE

PIIRIKAAVIO

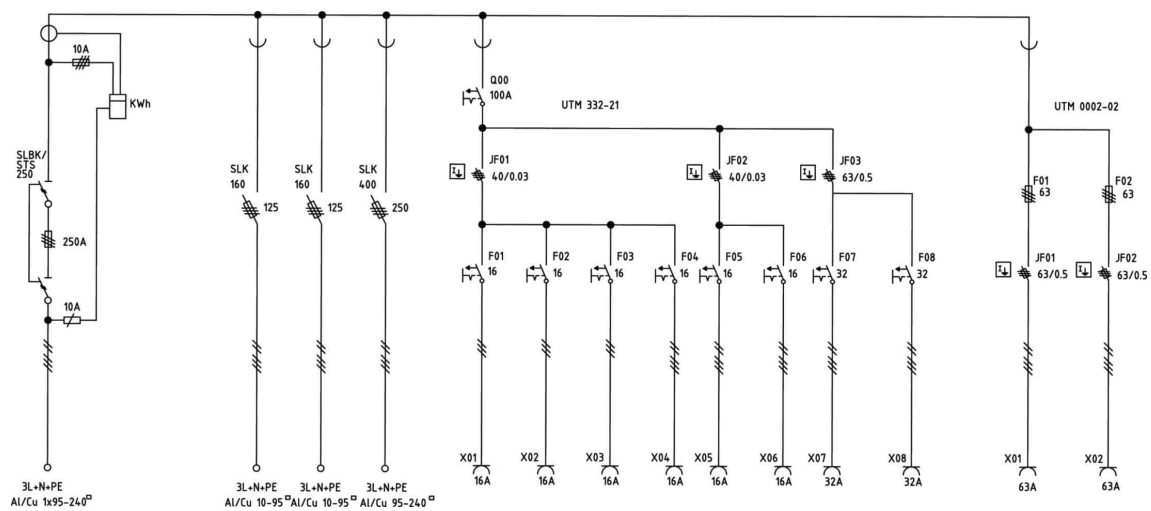

KUVAT

