




Modular temporary power supply cabinet with meter to hard use at construction sites. Robust and compact marine aluminum frame, lifting eyes, forklift pockets and lockable doors. Space reserve for kWh meter. Weight 250 kg.

TEKNISET TIEDOT

Tuotekoodi	S19481
Nominal Current	630 A
Nominal voltage	400V
Input fuses	NH1 1x250A 2x400A
Size of the input cable	3 x 95-240
Kiinteät lähdöt	NH00 125A ja NH1-2 250A
Fuse output	3 x SLK 160 ja 2 x SLK 400
Socket outlets	2 x 16A (230V), 1 x 16A, 2 x 32A, 1 x 63A

RCD	30 mA ja 300 mA
Short-circuit resistance	I _{cf} = 25 kA
Weight	250 kg
Dimensions (H x W x D)	1916 x 1264 x 834 mm
Enclosure class	IP44
Mallinumero	ZFSF630/32/2121-12 FI
Ordering number	S19251
Approvals	CE, EN60439-2

PIIRIKAAVIO

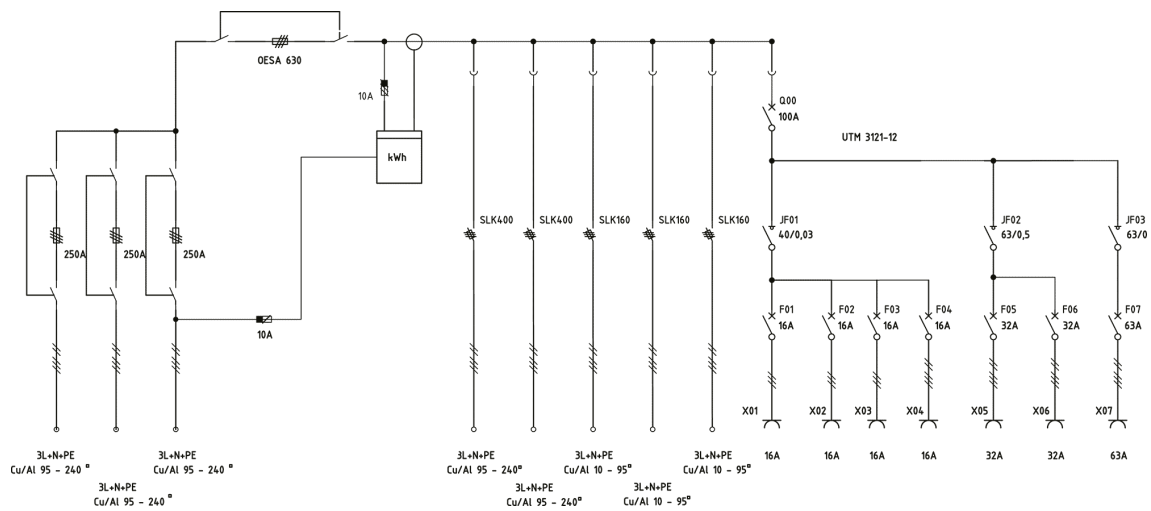

KUVAT

