




Modular temporary power supply cabinet with meter to hard use at construction sites. Robust and compact marine aluminum frame, lifting eyes, forklift pockets and lockable doors. Space reserve for kWh meter. Weight 250 kg.

TEKNISET TIEDOT

Tuotekoodi	S19481	RCD	30 mA ja 300 mA
Nominal Current	630 A	Short-circuit resistance	I _{cf} = 25 kA
Nominal voltage	400V	Weight	250 kg
Input fuses	NH1 1x250A 2x400A	Dimensions (H x W x D)	1916 x 1264 x 834 mm
Size of the input cable	3 x 95-240	Enclosure class	IP44
Kiinteät lähdöt	NH00 125A ja NH1-2 250A	Mallinumero	ZFSF630/32/2121-12 FI
Fuse output	3 x SLK 160 ja 2 x SLK 400	Ordering number	S19251
Socket outlets	2 x 16A (230V), 1 x 16A, 2 x 32A, 1 x 63A	Approvals	CE, EN60439-2

PIIRIKAAVIO

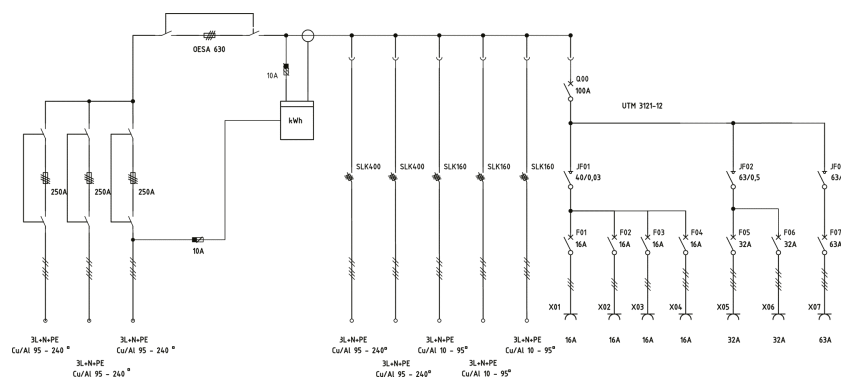

KUVAT

