



Temporary power supply cabinet with meter for heavy site use.


Sturdy and compact case with lockable door and folding stainless steel foot. The frame of the cabinet is made of powder-coated and corrosion-resistant 2 mm aluminum. Space reserve for kWh meter. Weight 23 kg.

TEKNISET TIEDOT

Tuotekoodi	S19175	RCD	30 mA ja 300 mA
Nominal Current	63 A	Short-circuit resistance	I _{cf} = 17 kA
Nominal voltage	400 V (50 Hz)	Weight	23 kg
Input fuses	DIII 63 A	Dimensions (H x W x D)	822 x 735 x 279 mm
Size of the input cable	1 x 16-95	Enclosure class	IP44
Fixed outlet	1 x 63 A	Model	ZSF63/1/1111-11
Fuse output	1 x SLK 160	Ordering number	S19175
Socket outlets	1 x 16A (230V), 1 x 16A, 1 x 32A, 1 x 63A	Approvals	CE

PIIRIKAAVIO

1	2	3	4	5	6	7	8	9	10
---	---	---	---	---	---	---	---	---	----

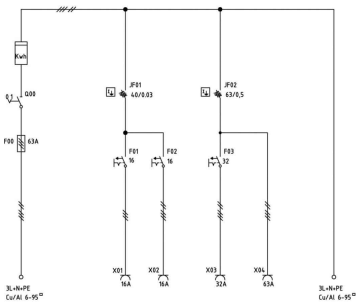

SATEMA
 OSELO MOSELY
 TIE22 27 01 00 TIE22 33 44 30

SP 63/0/000-10 FI
 FINLAND
 SATEMA AB

ZSF 63/1/1111-11	S19175	
HS	AS	1
22.04.10	X	X

KUVAT

